# WPR612

## 19” Wall Mountable Rack - 12 Units

## Features

- Stores up to 12 units of 19” equipment
- Loading capacity of 60 Kg
- Integrated ventilation grid on top
- Cable entry on top & bottom (closable)
- Removable sides for easy installing & cabling
- Tempered smokey grey glass door with keylock
- Front in depth adjustable 19” profiles (max 560 mm)
- Punched square holes for use with snap-in cage nuts

## Description

The WPR612 is a professional 19” wall mount metal rack compliant to ANSI/EIA RS-310D, DIN41491, IEC 60297 standards. It is a solid construction with a cold rolled steel 1,5 mm thick frame and 1,2 mm thick plates. The WPR612 comes fully assembled and can easily be mounted on the wall. The 19” mounting profile with punched square holes for use with snap-in cage nuts in combination with the printed unit measurement indicators ensure easy fitting of the equipment. The tempered smokey grey glass door is fitted with a keylock to keep the equipment only accessible for authorized persons. The removable sides allow easy installing and cabling of the equipment while the in depth adjustable 19” profiles provide great flexibility for installing equipment depending on its depth.

## Technical Drawing

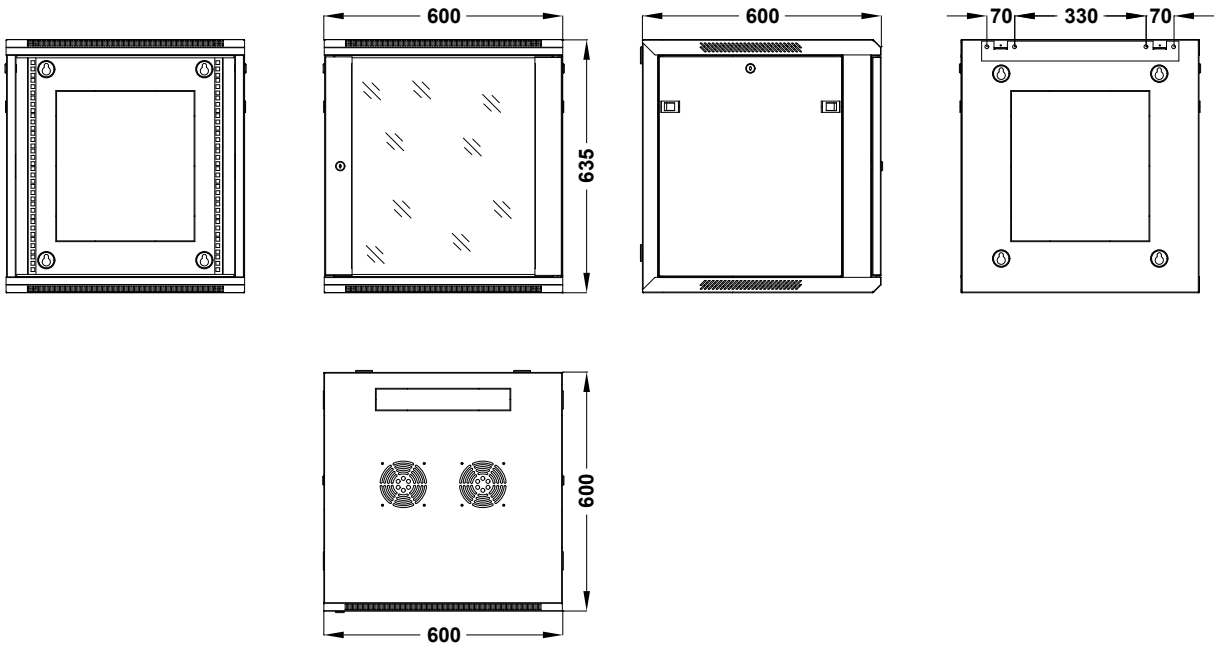


## Specifications

| PROPERTY | VALUE |
|---|---|
| Unit height | 12 HE |
| Max usable depth | 560 mm |
| Max load | 60 kg |
| Width | 600 mm |
| Depth | 600 mm |
| Height | 635 mm |
| Weight | 30 kg |
| Rack color | Black (RAL 9004) |

## Included Accessories

| ARTICLE | QUANTITY |
|---|---|
| SPR60LR | 1 |
| Key for front door | 2 |
| Key for sidepanel lock | 4 |
| Cage Nut + Screw | 20 |
| Allen key | 1 |

## Optional Accessories

| ARTICLE | DESCRIPTION |
|---|---|
| SPR60FS | Fixed shelf |
| SPR60LR | L-Rail pair |
| KM600 | Cage nuts |
| KS600 | Screws for cage nuts |