

TECHNICAL SPECS

CONTROLLER DX61

Input Voltage: 100-240V AC

Output Signal: RF 2.4G + DMX512

Control Mode: Dimming

Operating distance: 30m

Temperature: -30°C / -55°C

Package Size: L106 x W106 x H60 (mm)

Weight: 235g

RECEIVER R4-5A

Operating voltage: 5-24V DC

Max Current Load: 5A x 4CH Max. 20A


Max Output Power: 100/240/480W(5/12/24V)

Temperature: -30°C / -55°C


Package Size: L178 x W48 x H33 (mm)

Weight: 150g

DIMENSIONS

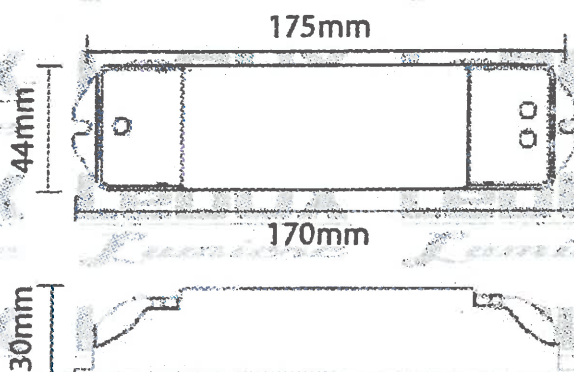

R4-5A Receiver

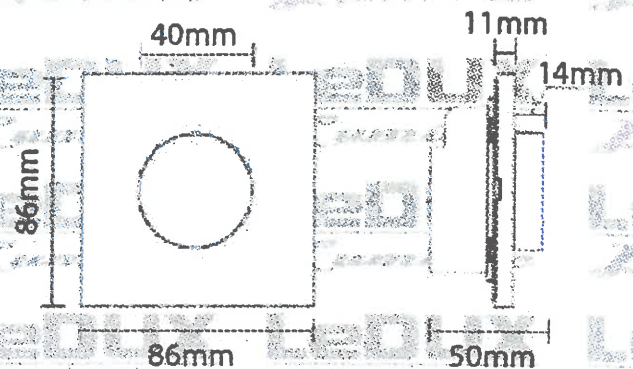

Controller DX61

UTILISATION



Short press : On/Off

Long press : Adjust Brightness

Spin : Adjust Brightness

When powered off, long press the knob for 5 seconds to turn on (off) the key tone.



100-240V AC
Power Input Socket

DMX Signal
Output Socket


OPERATING INSTRUCTIONS



Match Code : Short press "ID learning button" on the R4-5A/R4-CC receiver, the running light keeps on. Then press or spin the knob on the DX61 panel, the buzzer long beep, match successfully.

Clear Code : Long press "ID learning button" on the R4-5A/R4-CC receiver for 5S, the buzzer long beep, deactivate the matching successfully.

DMX WIRING DIAGRAM

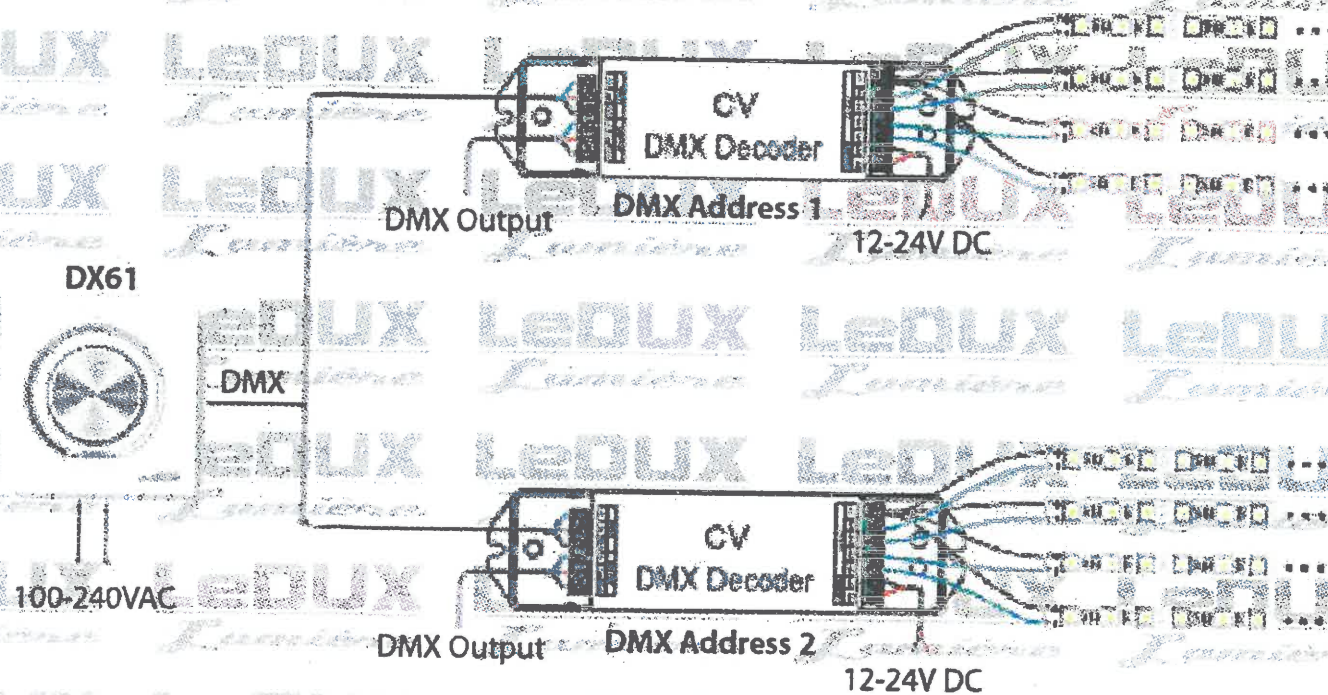

RECEIVER WIRING DIAGRAM

