

► Features

- Stores up to 6 units of 19" equipment
- Double section allowing easy access to rear side of equipment
- Double lock connecting front and rear section
- Integrated ventilation grid & cable entry
- Tempered smokey grey glass door with wing knob lock
- Reversible door position & removable sides
- In depth adjustable 19" profiles
- Static load up to 60 kg




► Description

The HPR506 is a professional 19" double section wall rack cabinet which complies to ANSI/EIA RS-310D, DIN41491 and IEC60297 standards. It ensures maximum installation, connectivity and maintenance ease storing up to 6 units of 19" equipment. The solid construction made of an 1.5 mm thick steel frame and 1.2 mm thick plates is finished with a black (RAL9004) fine structured powder coating. It provides a stable and secure installation while the double section structure allows easy access to the rear side of the equipment. The tempered smokey glass front door is reversible and secured with a key lock which keeps the equipment accessible for authorized persons only. Other present features are removable sides and in depth adjustable 19" profiles with unit measurement indicators and punched square holes.



► Technical Drawing

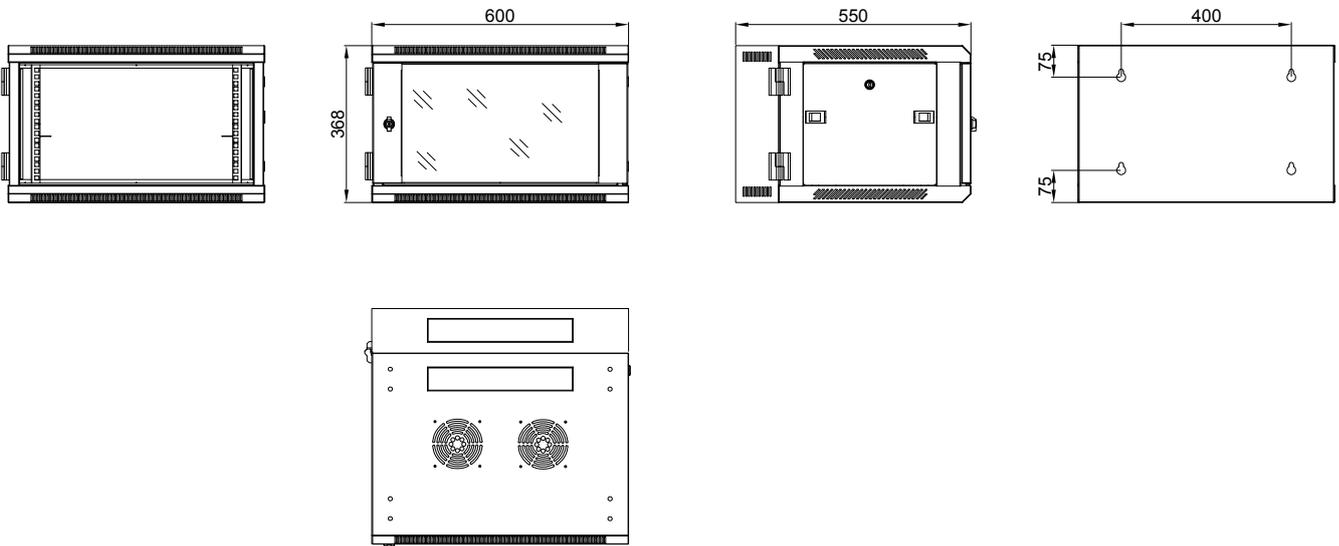

► Specifications

PROPERTY	VALUE
Unit height	6 HE
Max usable depth	510 mm
Max load	60 kg
Width	600 mm
Depth	550 mm
Height	368 mm
Weight	22,2 kg
Rack color	Black (RAL 9004)

► Included Accessories

ARTICLE	QUANTITY
WPR45LR	1
Key for front door	2
Key for sidepanel lock	4
Cage Nut + Screw	10
Allen key	1

► Optional Accessories

ARTICLE	DESCRIPTION
WPR45FS	Fixed shelf
WPR45LR	L-Rail pair
WPR10RF	Roof fan 120x120 mm
SPR10DC	Dust cover brush
KM600	Cage nuts
KS600	Screws for cage nuts

► Architects' and Engineers' Specifications

The rack shall have the following dimensions: height 368 mm, depth 550 mm, width 600 mm, have a weight of 22,2 kg and hold up to 6 units. It shall comply with ANSI/EIA RS-310D, DIN41491 and IEC60297 standards and have a double section structure which provides maximum installation, connectivity and maintenance ease. The wall part shall be separable from the rack which allows pre loading of the rack and mounting of the panel without the rack attached. The frame of the rack shall be constructed out of cold rolled steel of 1.5 mm thick while for the other parts a thickness of 1.2 mm shall be used. These parts shall have a textured black (RAL9004) powder coating. The mounting profile shall be adjustable in depth and have printed unit measurement indicators. The rack shall include a tempered smokey grey glass door which is reversible in position and equipped with a standard wing knob key lock. The sides of the rack shall be removable and the top shall have a ventilation grid.