

► Features


- Stores up to 9 units of 19" equipment
- Loading capacity of 60 Kg
- Integrated ventilation grid on top
- Cable entry on top & bottom (closable)
- Removable sides for easy installing & cabling
- Tempered smokey grey glass door with keylock
- Front in depth adjustable 19" profiles (max 560 mm)
- Punched square holes for use with snap-in cage nuts

► Description

The WPR609 is a professional 19" wall mount metal rack compliant to ANSI/EIA RS-310D, DIN41491, IEC 60297 standards. It is a solid construction with a cold rolled steel 1,5 mm thick frame and 1,2 mm thick plates. The WPR609 comes fully assembled and can easily be mounted on the wall. The 19" mounting profile with punched square holes for use with snap-in cage nuts in combination with the printed unit measurement indicators ensure easy fitting of the equipment. The tempered smokey grey glass door is fitted with a keylock to keep the equipment only accessible for authorized persons. The removable sides allow easy installing and cabling of the equipment while the in depth adjustable 19" profiles provide great flexibility for installing equipment depending on its depth.



► Technical Drawing

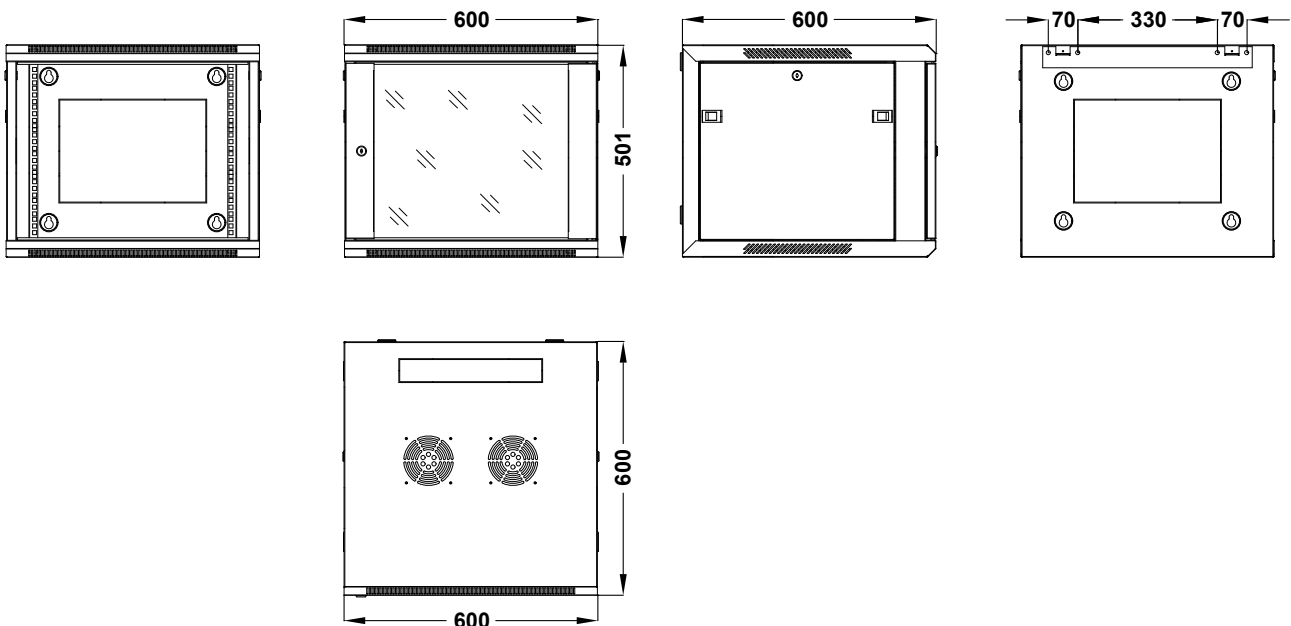

► Specifications

PROPERTY	VALUE
Unit height	9 HE
Max usable depth	560 mm
Max load	60 kg
Width	600 mm
Depth	600 mm
Height	501 mm
Weight	26 kg
Rack color	Black (RAL 9004)

► Included Accessories

ARTICLE	QUANTITY
SPR60LR	1
Key for front door	2
Key for sidepanel lock	4
Cage Nut + Screw	10
Allen key	1

► Optional Accessories

ARTICLE	DESCRIPTION
SPR60FS	Fixed shelf
SPR60LR	L-Rail pair
KM600	Cage nuts
KS600	Screws for cage nuts